

## 2007 Hummer H3

### 2007 ACCESSORIES & EQUIPMENT Interior Trim and Paneling - H3

## 2007 ACCESSORIES & EQUIPMENT

### Interior Trim and Paneling - H3

## SPECIFICATIONS


### FASTENER TIGHTENING SPECIFICATIONS

#### Fastener Tightening Specifications

Application	Specification	
	Metric	English
Sunshade Bolt	2 N.m	18 lb in
Rear Side Door Armrest Bracket Bolt	10 N.m	89 lb in
C Pillar Assist Handle Bolt	52 N.m	38 lb ft
Assist Handle Bolt	9 N.m	80 lb in
Rear Seat Cup Holder Screw	2 N.m	18 lb in
Upper Body Side Garnish Screw	2 N.m	18 lb in
Windshield Side Garnish Screw	9 N.m	80 lb in
Door Trim Panel Screw	2 N.m	18 lb in
Door Trim Panel Bolt	9 N.m	80 lb in
Sunshade Screw	2 N.m	18 lb in

## REPAIR INSTRUCTIONS

### DOOR INSIDE HANDLE BEZEL REPLACEMENT

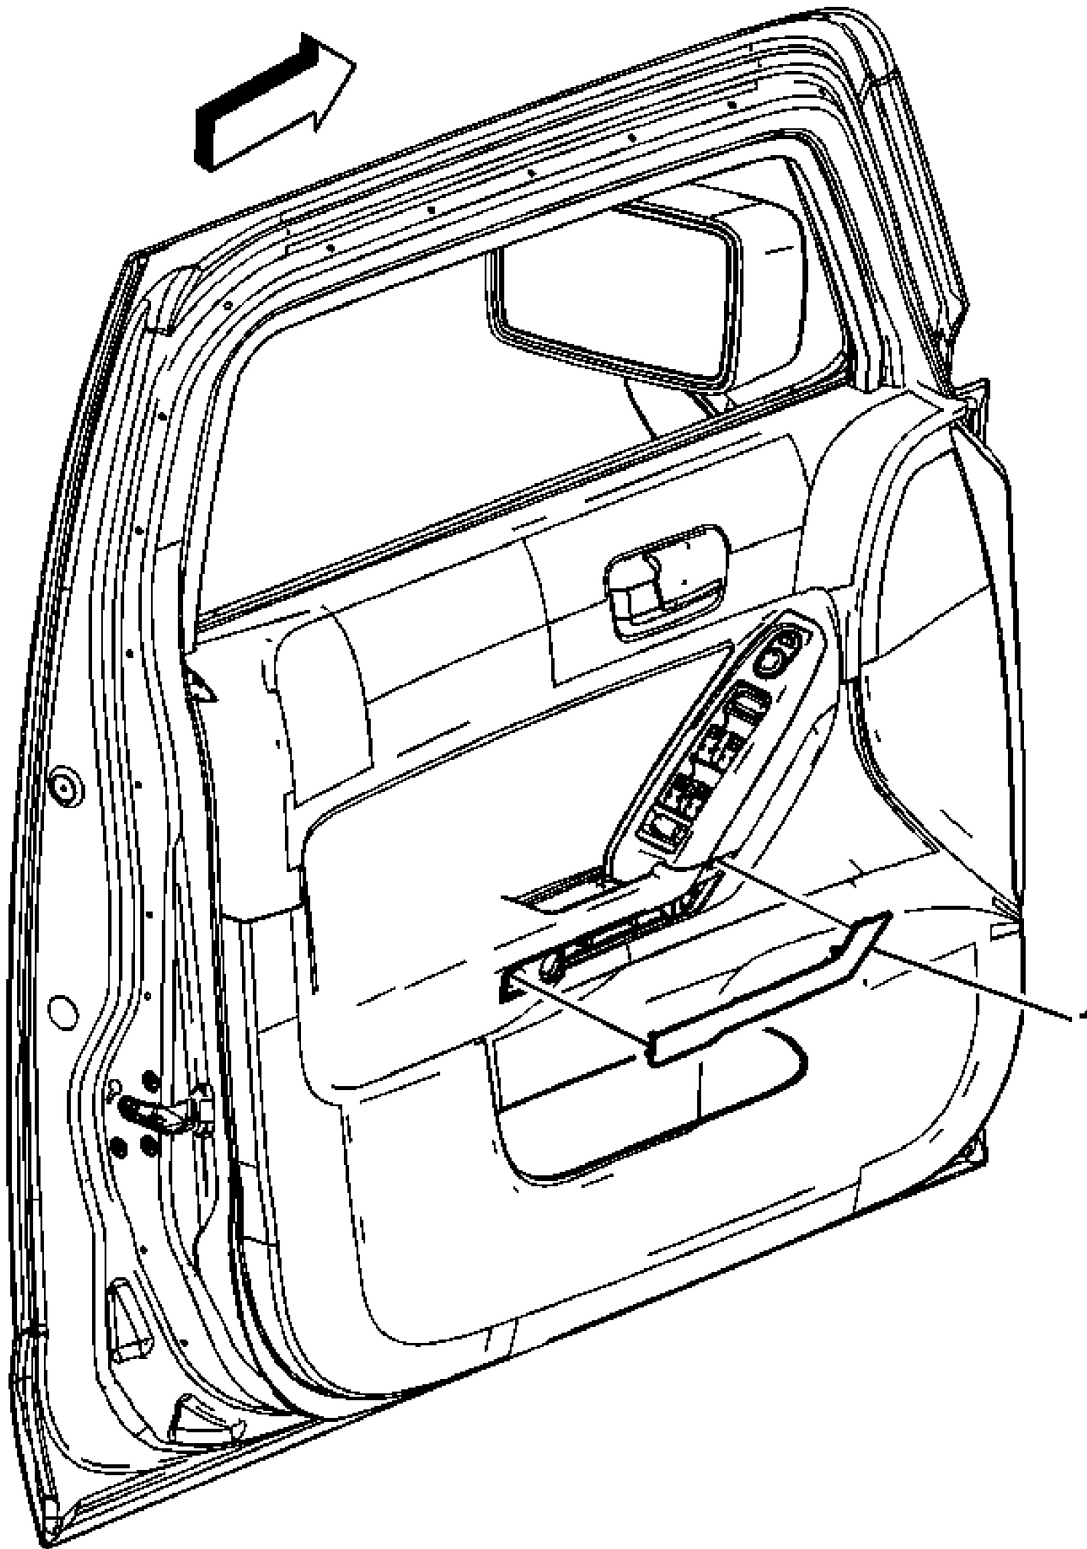


**Fig. 1: Removing/Installing Door Inside Handle Bezel**

Courtesy of GENERAL MOTORS CORP.

### Door Inside Handle Bezel Replacement

Callout	Component Name
1	Front Side Door Armrest Finish Cover

### FRONT SIDE DOOR TRIM PANEL REPLACEMENT

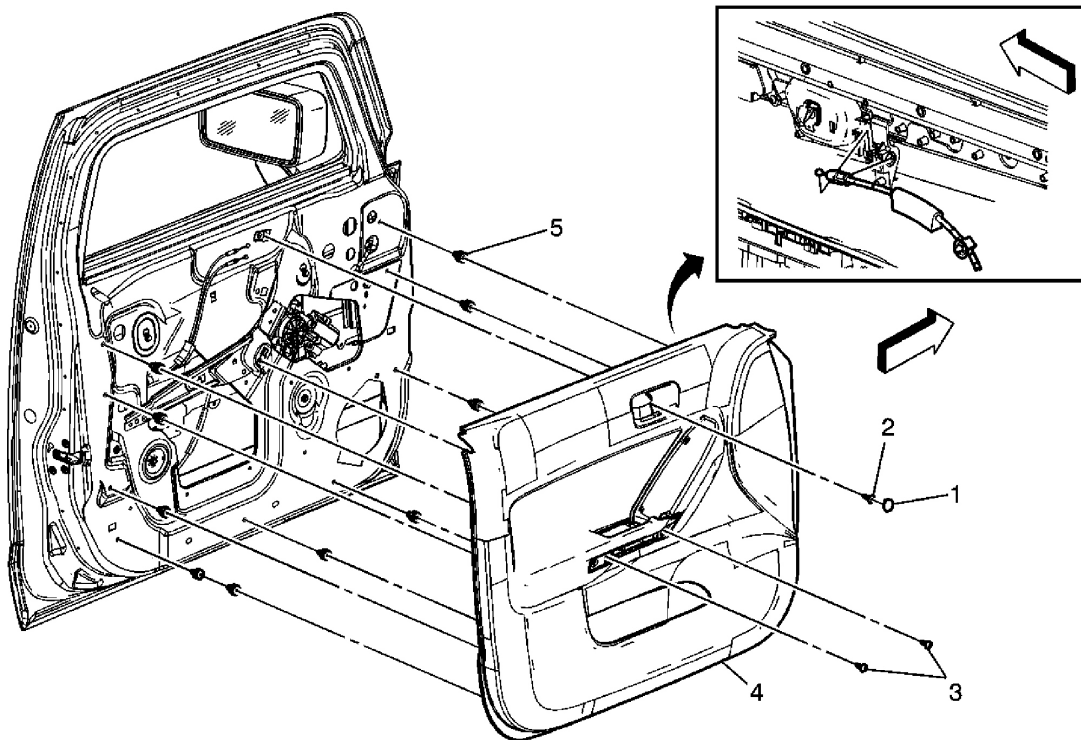

**Fig. 2: Removing/Installing Front Side Door Trim Panel**  
Courtesy of GENERAL MOTORS CORP.

### Front Side Door Trim Panel Replacement


Callout	Component Name
<b>Preliminary Procedure</b>	
1.	Remove inside handle bezel. Refer to <u>Door Inside Handle Bezel Replacement</u> .
2.	Remove the door window switches. Refer to <u>Door Lock and Side Window Switch Replacement - Driver Side (1st Design)</u> or <u>Door Lock and Side Window Switch Replacement - Driver Side (2nd Design)</u> or <u>Door Lock and Side Window Switch Replacement - Passenger Side</u> .

## 2007 Hummer H3

### 2007 ACCESSORIES & EQUIPMENT Interior Trim and Paneling - H3

1	Trim Bolt Accessory Hole Cover
2	Door Trim Panel Screw  <b>NOTE:</b> <b>Refer to <u>Fastener Notice</u> .</b>  <b>Tighten:</b> 2 N.m (18 lb in)
3	Door Trim Panel Bolt (Qty: 2)  <b>Tighten:</b> 9 N.m (80 lb in)
4	Side Door Trim Panel Assembly <b>Tip:</b>  <ol style="list-style-type: none"><li>1. Release the inside door handle cables. Refer to <b><u>Front Side Door Inside Handle Replacement</u></b> .</li><li>2. Disconnect the electrical connectors.</li></ol>
5	Side Door Trim Panel Retainer (Qty: 9)

### REAR SIDE DOOR TRIM PANEL REPLACEMENT

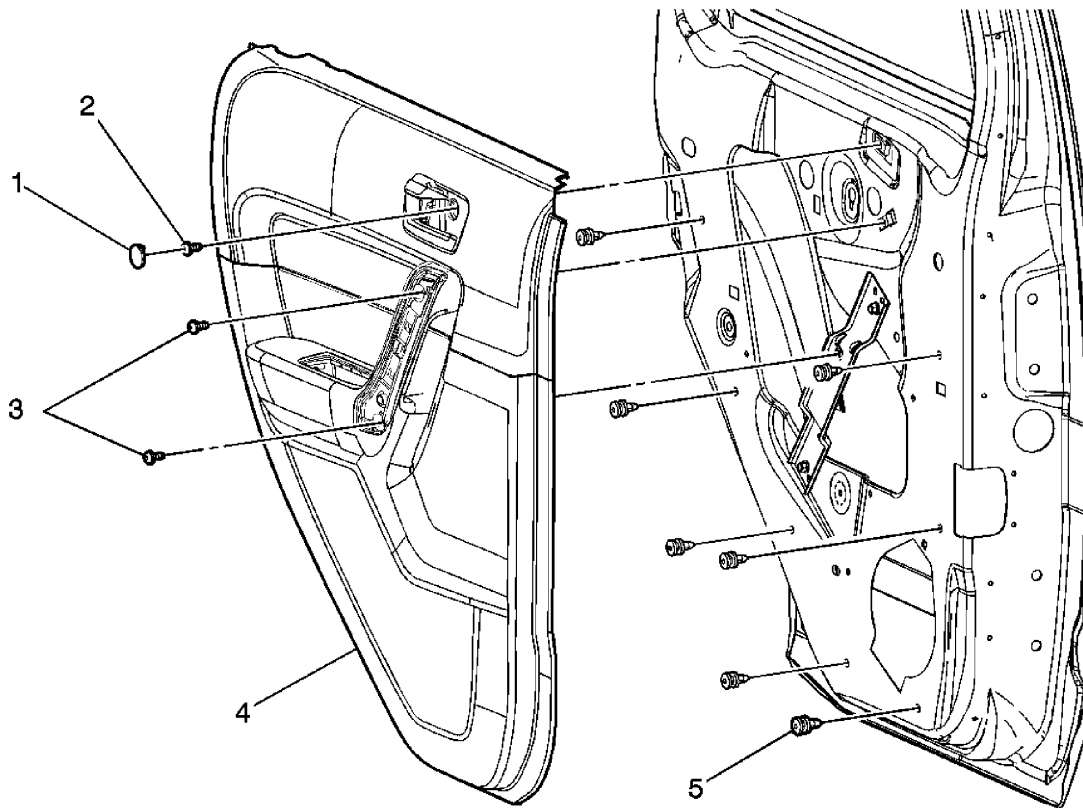

**Fig. 3: Trim Panel Replacement - Side Rear Door**  
Courtesy of GENERAL MOTORS CORP.

### Rear Side Door Trim Panel Replacement


Callout	Component Name
<b>NOTE:</b> Refer to <u>Fastener Notice</u> .	
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedure</b>	
1. Remove inside handle bezel. Refer to <u>Door Inside Handle Bezel Replacement</u> .	
2. Remove the door window switches. Refer to <u>Rear Side Door Window Switch Replacement</u> .	
1	Cover, Trim Bolt Accessory Hole
2	Screw, Door Trim Panel

## 2007 Hummer H3

### 2007 ACCESSORIES & EQUIPMENT Interior Trim and Paneling - H3

	<b>Tighten:</b> 2 N.m (18 lb in)
3	Bolt, Door Trim Panel (Qty: 2) <b>Tighten:</b> 9 N.m (80 lb in)
4	Panel Assembly, Side Door Trim <b>Tip:</b> Release the inside door handle cables. Refer to <b><u>Front Side Door Inside Handle Replacement</u></b> .
5	Retainer, Side Door Trim Panel (Qty: 7)

### FRONT SIDE DOOR WATER DEFLECTOR REPLACEMENT

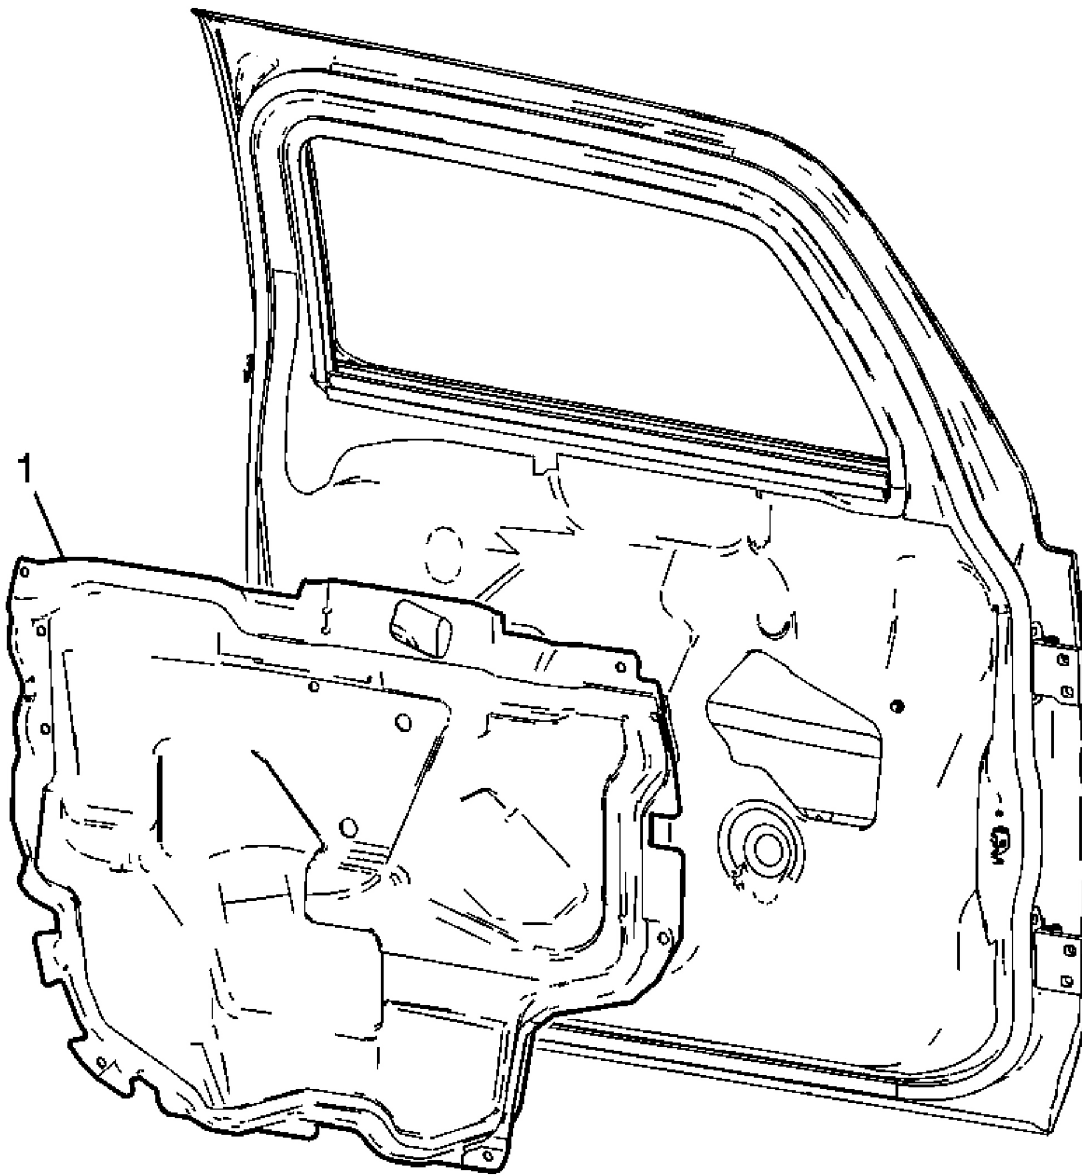


**Fig. 4: Water Deflector Replacement - Front Door**  
Courtesy of GENERAL MOTORS CORP.

#### Front Side Door Water Deflector Replacement

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u><b>Fastener Tightening Specifications</b></u> . <b>Preliminary Procedure:</b> Remove the interior trim panel. Refer to <u><b>Front Side Door Trim Panel Replacement</b></u> .	
1	Deflector Assembly, Front Side Door Water <b>Tip:</b> Carefully pull the water deflector away from the door while feeding

any wiring or connectors through the water deflector.

## REAR SIDE DOOR WATER DEFLECTOR REPLACEMENT

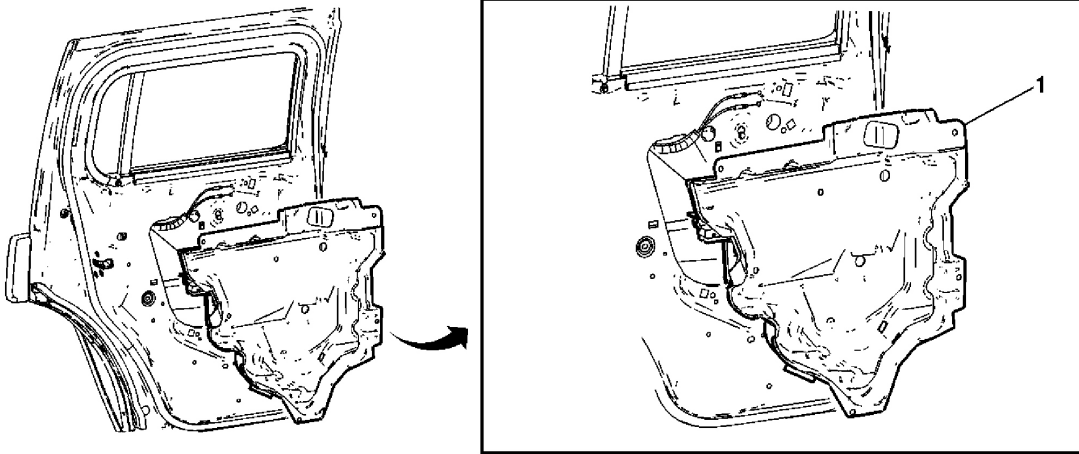


**Fig. 5: Water Deflector Replacement - Rear Door**  
Courtesy of GENERAL MOTORS CORP.

### Rear Side Door Water Deflector Replacement

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u><b>Fastener Tightening Specifications</b></u> . <b>Preliminary Procedure:</b> Remove the interior trim panel. Refer to <u><b>Rear Side Door Trim Panel Replacement</b></u> .	
1	Deflector Assembly, Rear Side Door Water <b>Tip:</b> Carefully pull the water deflector away from the door while routing any wiring or connectors through the water deflector.

## ARMREST BRACKET REPLACEMENT




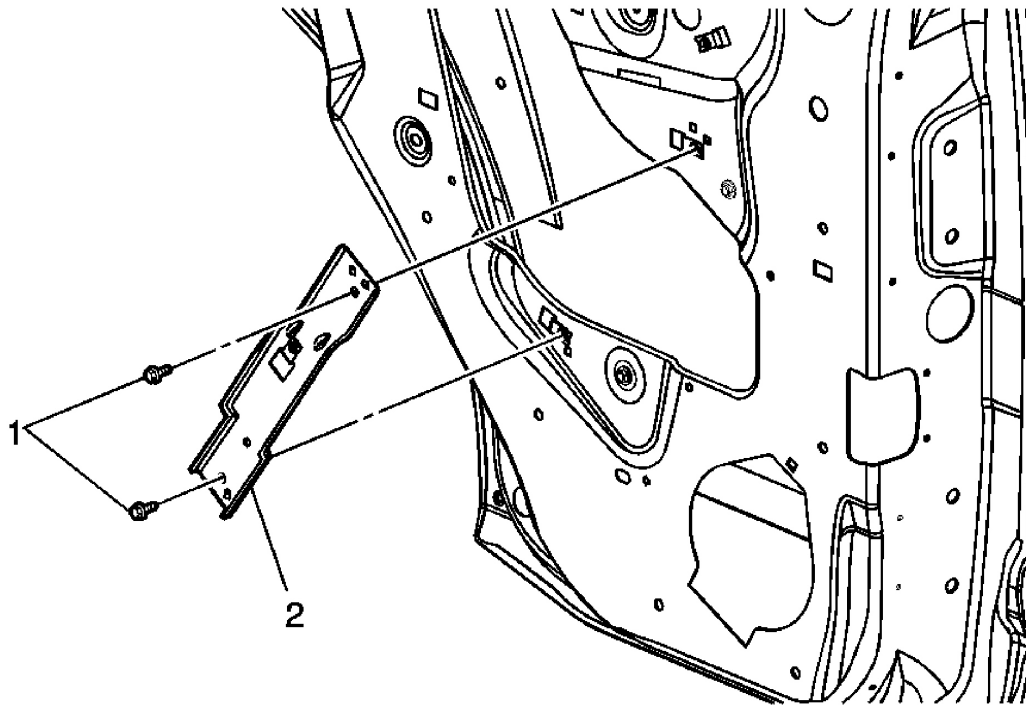

**Fig. 6: Armrest Bracket Replacement**  
 Courtesy of GENERAL MOTORS CORP.

### Armrest Bracket Replacement

Callout	Component Name
<b>NOTE:</b> Refer to <u>Fastener Notice</u> .	
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedures</b>	
1. Remove the interior trim panel. Refer to <u>Rear Side Door Trim Panel Replacement</u> .	
2. Remove the water deflector. Refer to <u>Rear Side Door Water Deflector Replacement</u> .	
1	Bolt, Rear Side Door Armrest Bracket (Qty: 2)  <b>Tighten:</b> 10 N.m (89 lb in)
2	Bracket, Rear Side Door Armrest

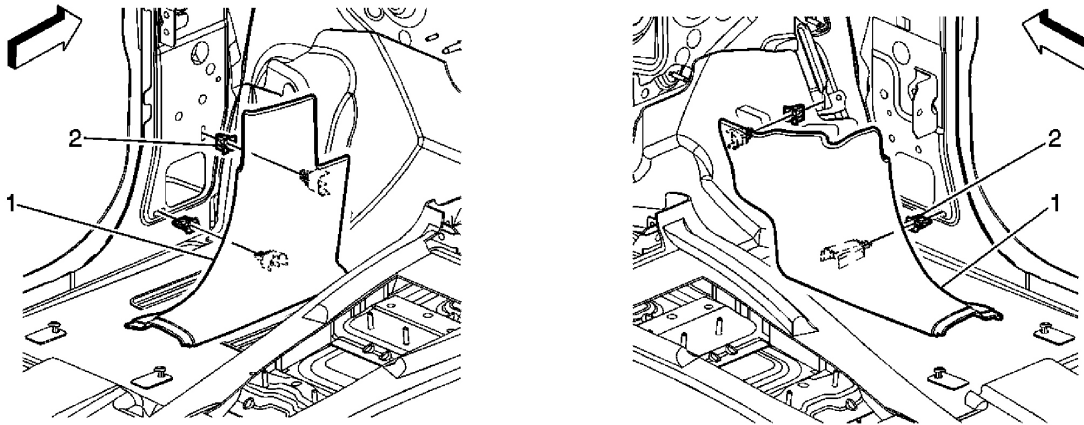


**Fig. 7: Cowl Side Trim Panel Replacement**  
Courtesy of GENERAL MOTORS CORP.

### Cowl Side Trim Panel Replacement

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedures:</b> Remove the front door sill trim plate. Refer to <u>Front Side Door Sill Plate Replacement</u> .	
1	Panel, Cowl Side Trim
2	Clip, Panel Cowl Side Trim (Qty: 2)

### FRONT SIDE DOOR SILL PLATE REPLACEMENT

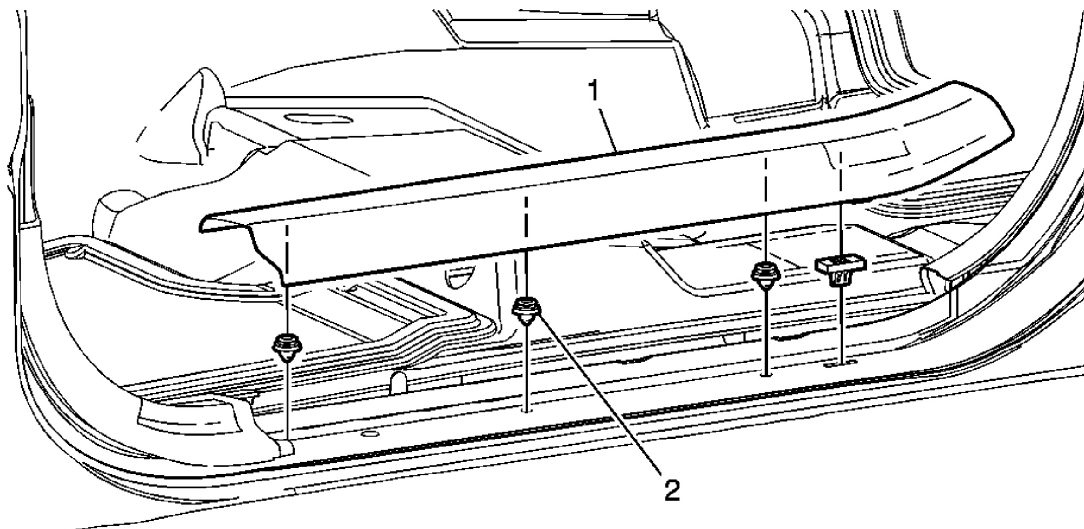


**Fig. 8: Front Side Door Sill Plate Replacement**  
Courtesy of GENERAL MOTORS CORP.

### Front Side Door Sill Plate Replacement

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
1	Plate Assembly, Front Side Door Sill Trim
2	Clip, Door Trim (Qty: 3)

### REAR SIDE DOOR SILL PLATE REPLACEMENT

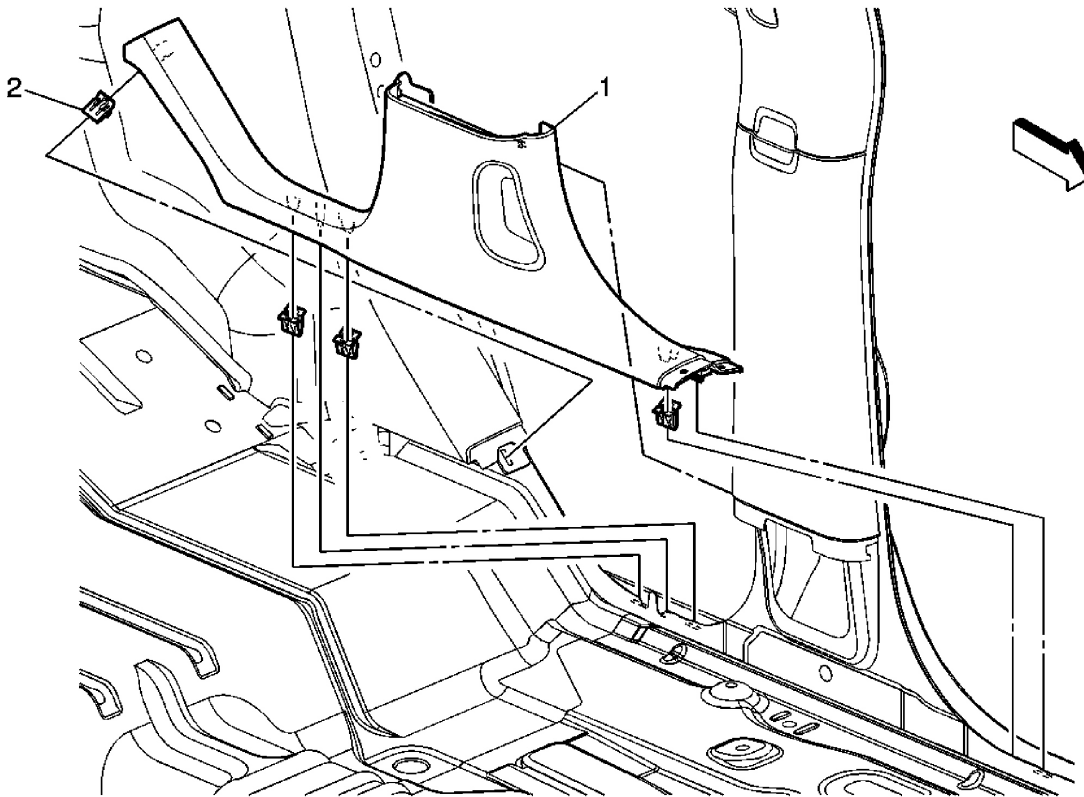

**Fig. 9: Rear Side Door Sill Plate Replacement**  
Courtesy of GENERAL MOTORS CORP.

### Rear Side Door Sill Plate Replacement


Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedures:</b>	
Remove the front door sill trim plate. Refer to <u>Front Side Door Sill Plate Replacement</u> .	

## 2007 Hummer H3

### 2007 ACCESSORIES & EQUIPMENT Interior Trim and Paneling - H3

1	Plate Assembly, Rear Side Door Sill Trim
2	Clip, Rear Side Door Sill Trim (Qty: 4)

#### LIFTGATE DOOR SILL PLATE REPLACEMENT

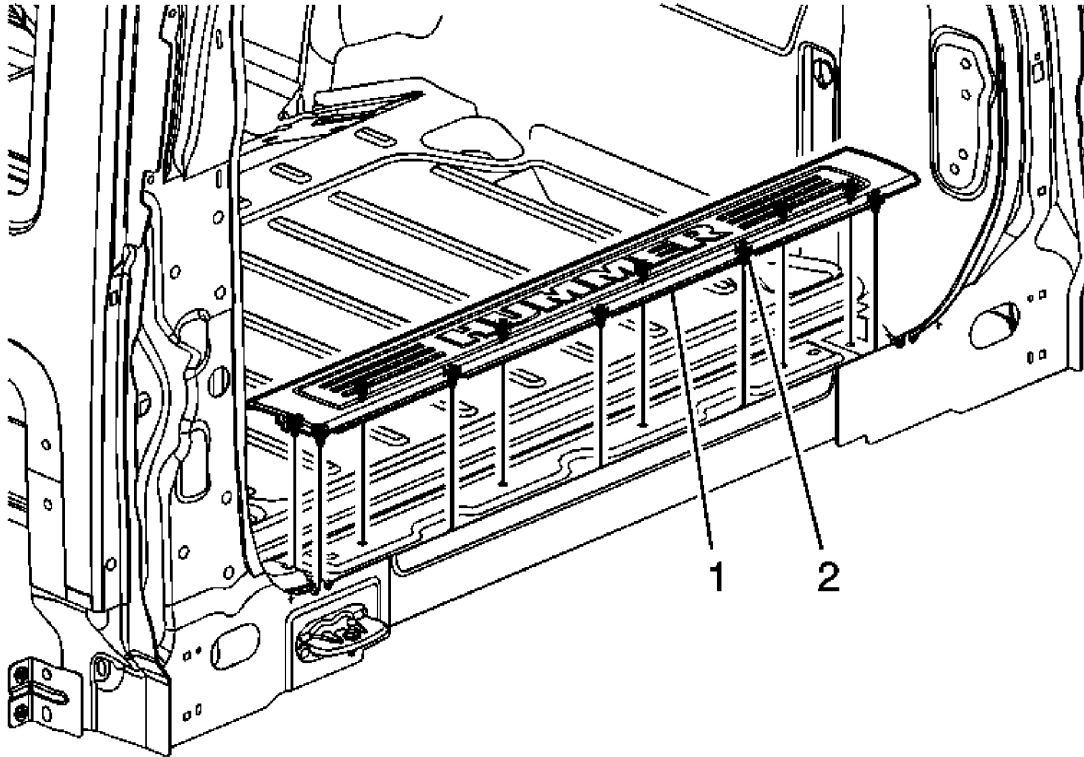


**Fig. 10: Liftgate Door Sill Plate Replacement**  
Courtesy of GENERAL MOTORS CORP.

#### Liftgate Door Sill Plate Replacement

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <b><u>Fastener Tightening Specifications.</u></b>	
1	Plate Assembly, Rear Door Sill Trim
2	Clip, Rear Door Sill Trim (Qty: 10)


#### ASSIST HANDLE REPLACEMENT

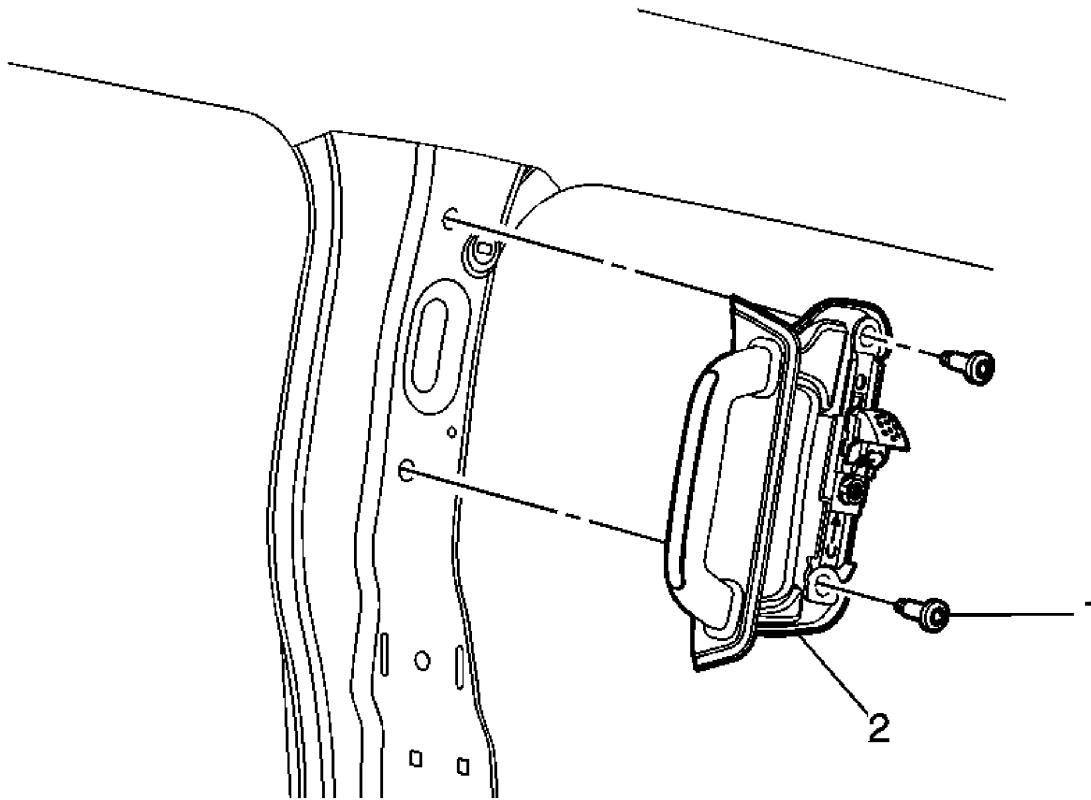**Fig. 11: Assist Handle Replacement**

Courtesy of GENERAL MOTORS CORP.

### Assist Handle Replacement

Callout	Component Name
<b>Preliminary Procedures</b>	
1. Remove the lower center pillar trim panel. Refer to <b><u>Center Pillar Lower Trim Panel Replacement</u></b> .	
2. Remove the upper center pillar trim panel. Refer to <b><u>Center Pillar Upper Trim Panel Replacement</u></b> .	
1	C Pillar Assist Handle Bolt (Qty: 2)  <b>NOTE:</b> Refer to <b><u>Fastener Notice</u></b> .  <b>Tighten:</b> 52 N.m (38 lb ft)
2	C Pillar Assist Handle Assembly

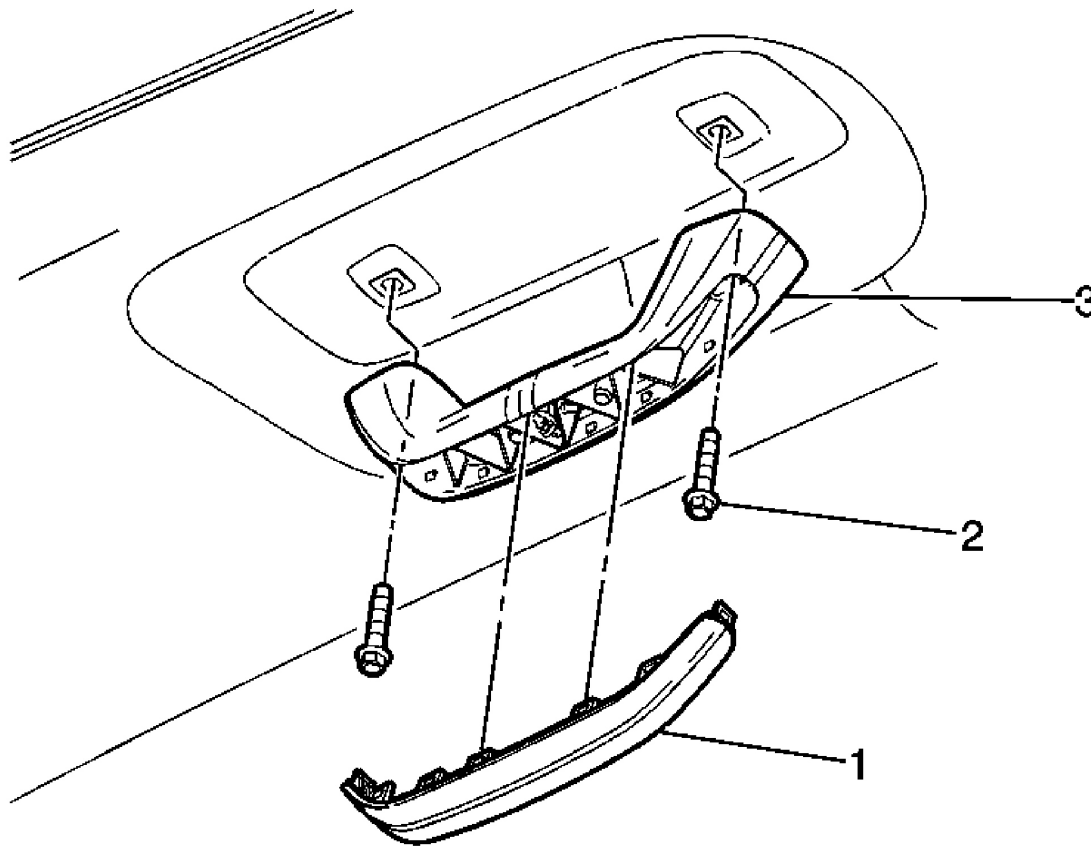
**ROOF RAIL REAR ASSIST HANDLE REPLACEMENT**

**Fig. 12: Roof Rail Rear Assist Handle Replacement**  
Courtesy of GENERAL MOTORS CORP.

**Roof Rail Rear Assist Handle Replacement**

Callout	Component Name
<b>NOTE:</b> Refer to <u>Fastener Notice</u> .	
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
1	Assist Handle Filler
2	Assist Handle Bolt (Qty: 2) <b>Tighten:</b> 9 N.m (80 lb in)
3	Assist Handle Assembly

**SUNSHADE REPLACEMENT**

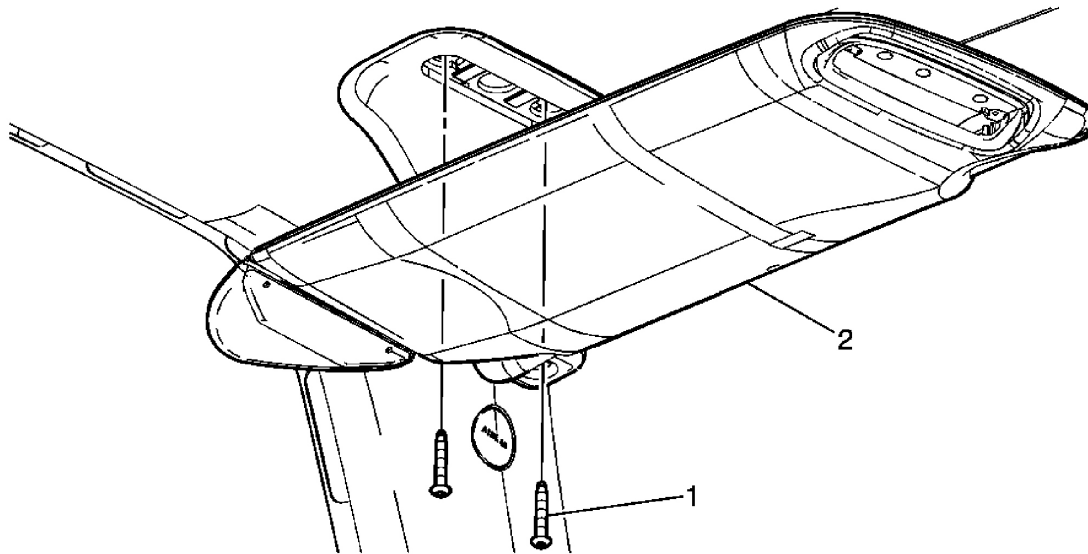


**Fig. 13: Sunshade Replacement**  
Courtesy of GENERAL MOTORS CORP.

#### Sunshade Replacement

Callout	Component Name
1	Sunshade Screws (Qty: 2)  <b>NOTE:</b> Refer to <u>Fastener Notice</u> .  <b>Tighten:</b> 2 N.m (18 lb in)
2	Sunshade Assembly <b>Tip:</b> Disconnect the electrical connector, if equipped.

#### SUNSHADE ANCHOR REPLACEMENT

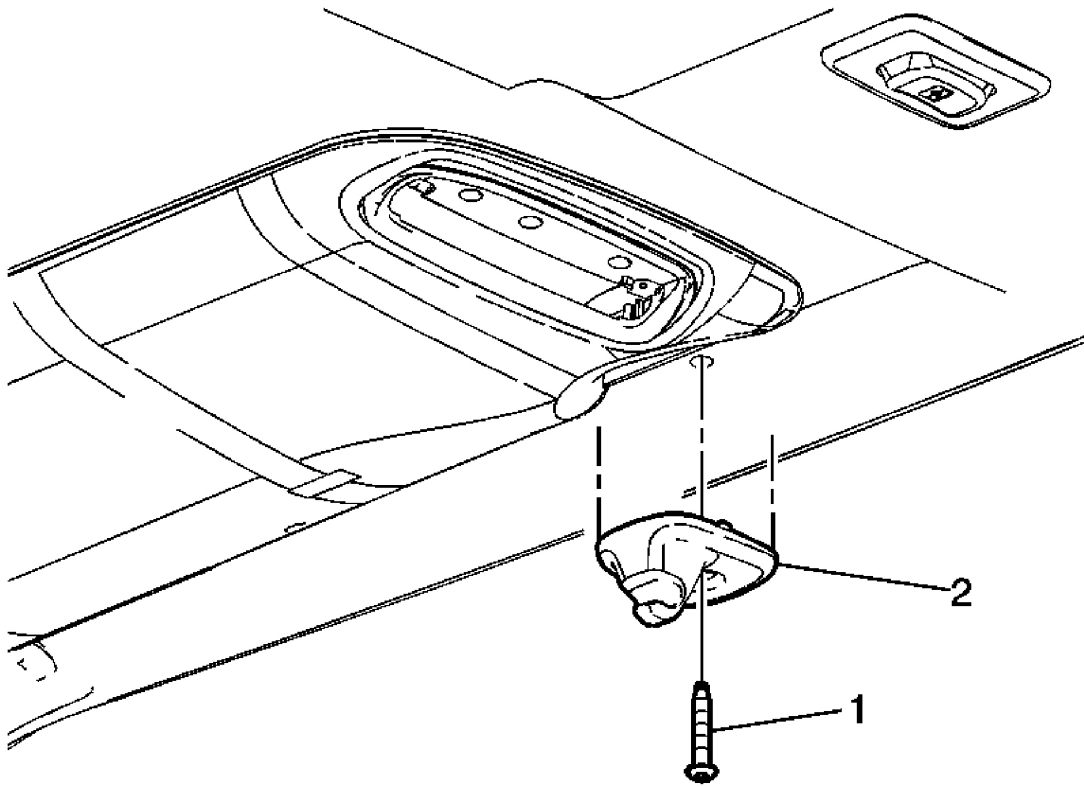


**Fig. 14: Sunshade Anchor Replacement**  
Courtesy of GENERAL MOTORS CORP.

#### Sunshade Anchor Replacement

Callout	Component Name
1	Sun Shade Bolt  <b>NOTE:</b> Refer to <u>Fastener Notice</u> .  <b>Tighten:</b> 2 N.m (18 lb in)
2	Sun Shade Assembly Support <b>Tip:</b> Disconnect the electrical connector, if equipped.

#### WINDSHIELD PILLAR GARNISH MOLDING REPLACEMENT



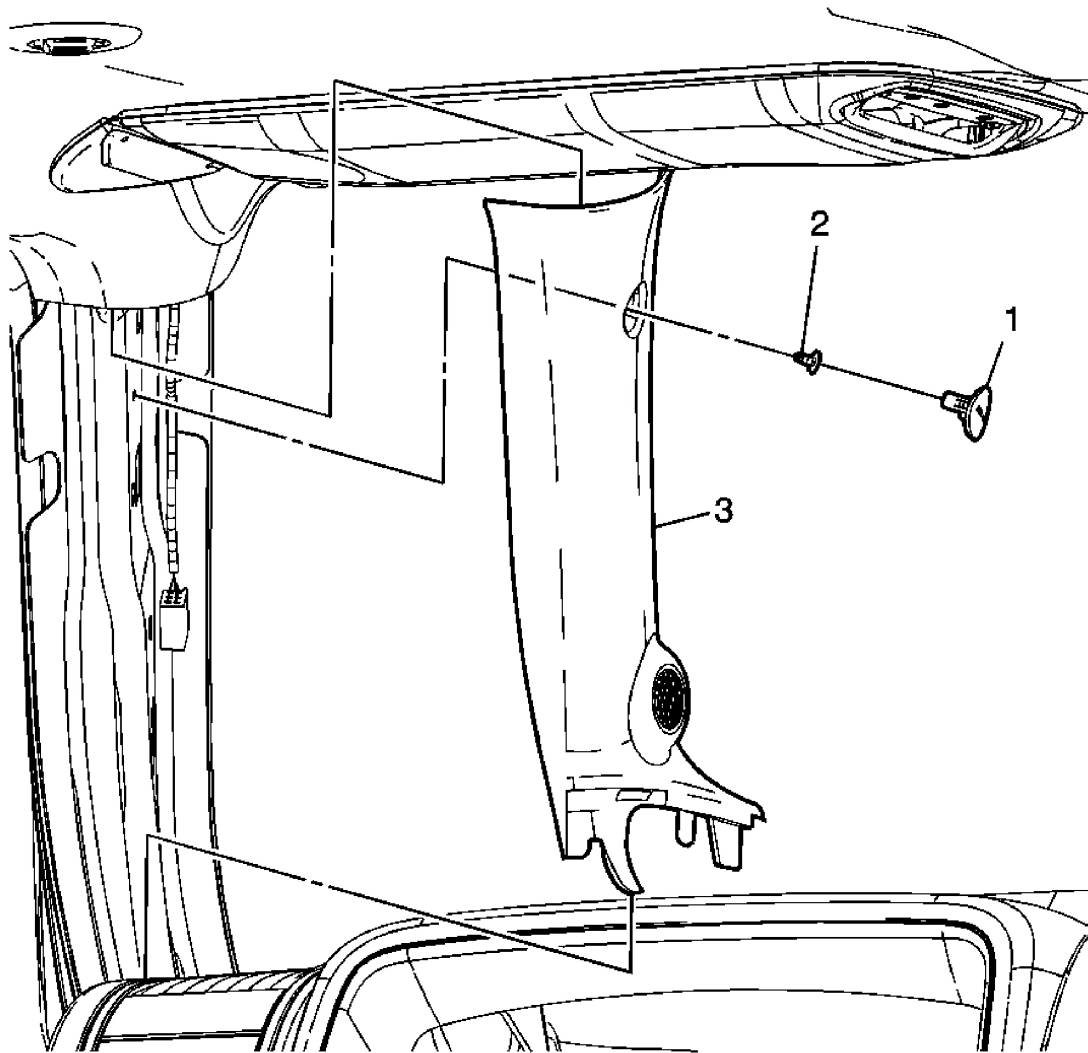

**Fig. 15: Windshield Pillar Garnish Molding Replacement**  
Courtesy of GENERAL MOTORS CORP.

### Windshield Pillar Garnish Molding Replacement


Callout	Component Name
<b>Preliminary Procedures:</b> Disable SIR system. Refer to <b><u>SIR Disabling and Enabling</u></b> .	
1	Windshield Side Garnish Bolt Hole Finish Plug
2	Windshield Side Garnish Screw  <b>NOTE:</b> Refer to <b><u>Fastener Notice</u></b> .

## 2007 Hummer H3

### 2007 ACCESSORIES & EQUIPMENT Interior Trim and Paneling - H3

	<b>Tighten:</b> 9 N.m (80 lb in)
3	Windshield Side Garnish Molding Assembly <b>Tip:</b> Disconnect the electrical connector.

#### BODY SIDE REAR UPPER GARNISH MOLDING REPLACEMENT

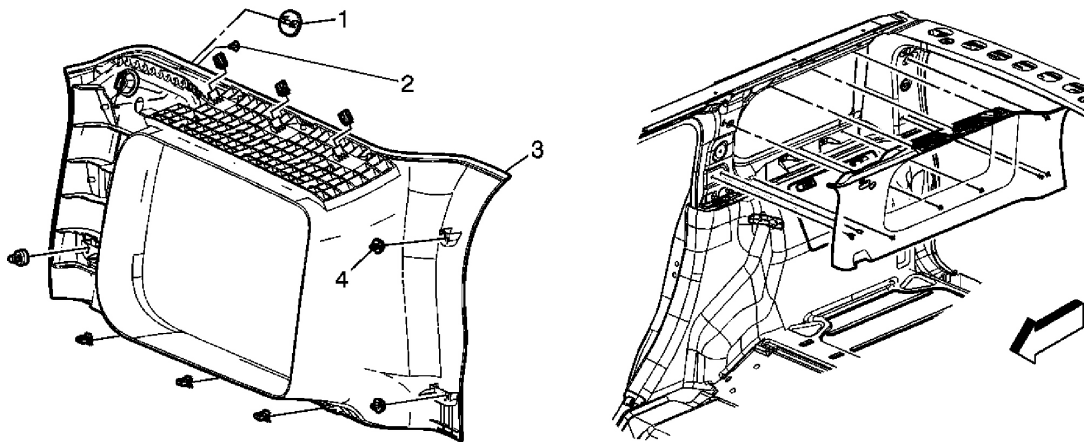


**Fig. 16: Body Side Rear Upper Garnish Molding Replacement**  
Courtesy of GENERAL MOTORS CORP.

#### Body Side Rear Upper Garnish Molding Replacement

Callout	Component Name
1	Upper Body Side Garnish Bolt Hole Finish Plug
2	Upper Body Side Garnish Screw  <b>NOTE:</b> <b>Refer to <u>Fastener Notice</u> .</b>  <b>Tighten:</b> 2 N.m (18 lb in)
3	Upper Body Side Garnish Molding Assembly
4	Upper Body Side Garnish Retainer (Qty: 9)

#### CENTER PILLAR UPPER TRIM PANEL REPLACEMENT

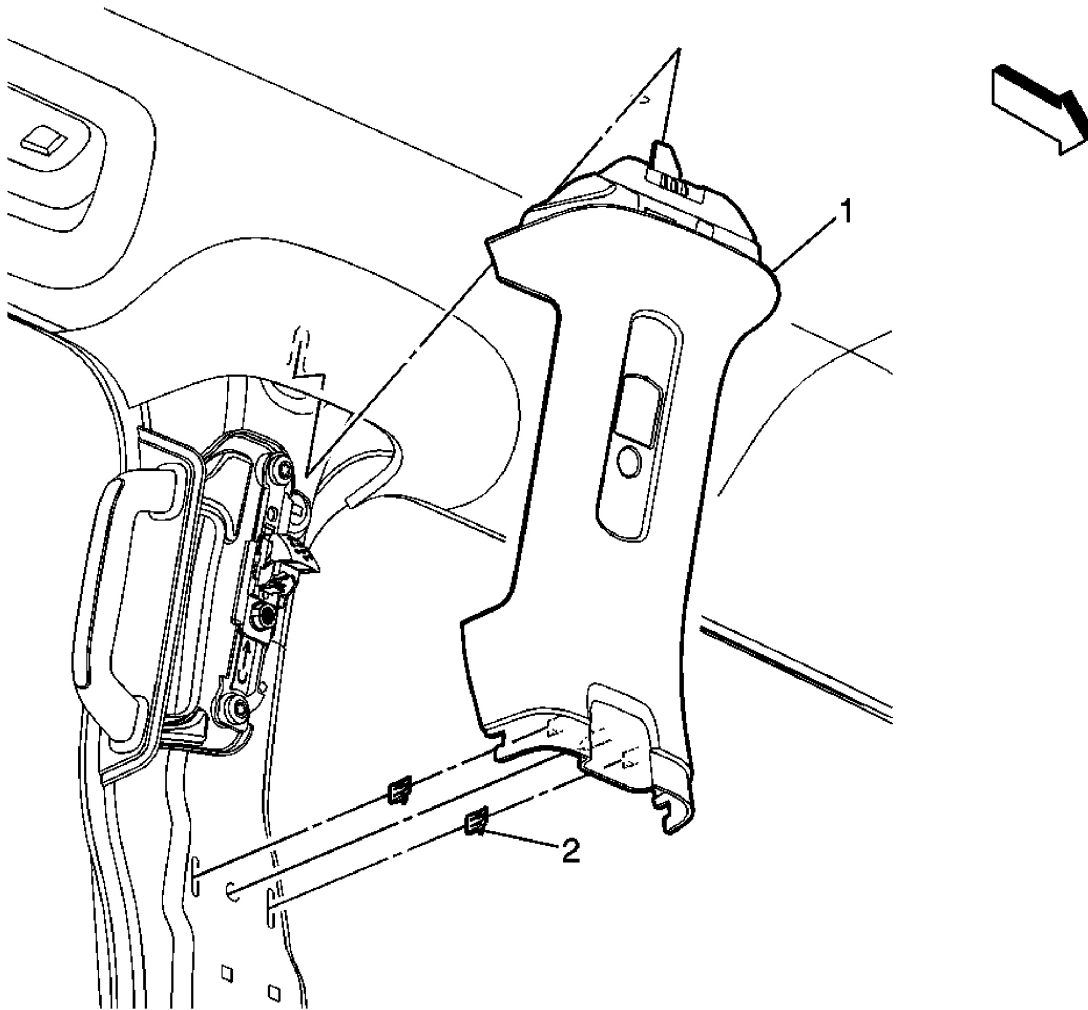


**Fig. 17: Upper Center Pillar Trim Panel Replacement**  
Courtesy of GENERAL MOTORS CORP.

### Center Pillar Upper Trim Panel Replacement

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedures</b>	
1. Remove the front seat belt. Refer to <u>Seat Belt Retractor Pretensioner Replacement - Front</u> .	
2. Remove the lower center pillar trim panel. Refer to <u>Center Pillar Lower Trim Panel Replacement</u> .	
1	C Pillar Upper Trim Panel Assembly

2

C Pillar Upper Trim Clip (Qty: 2)

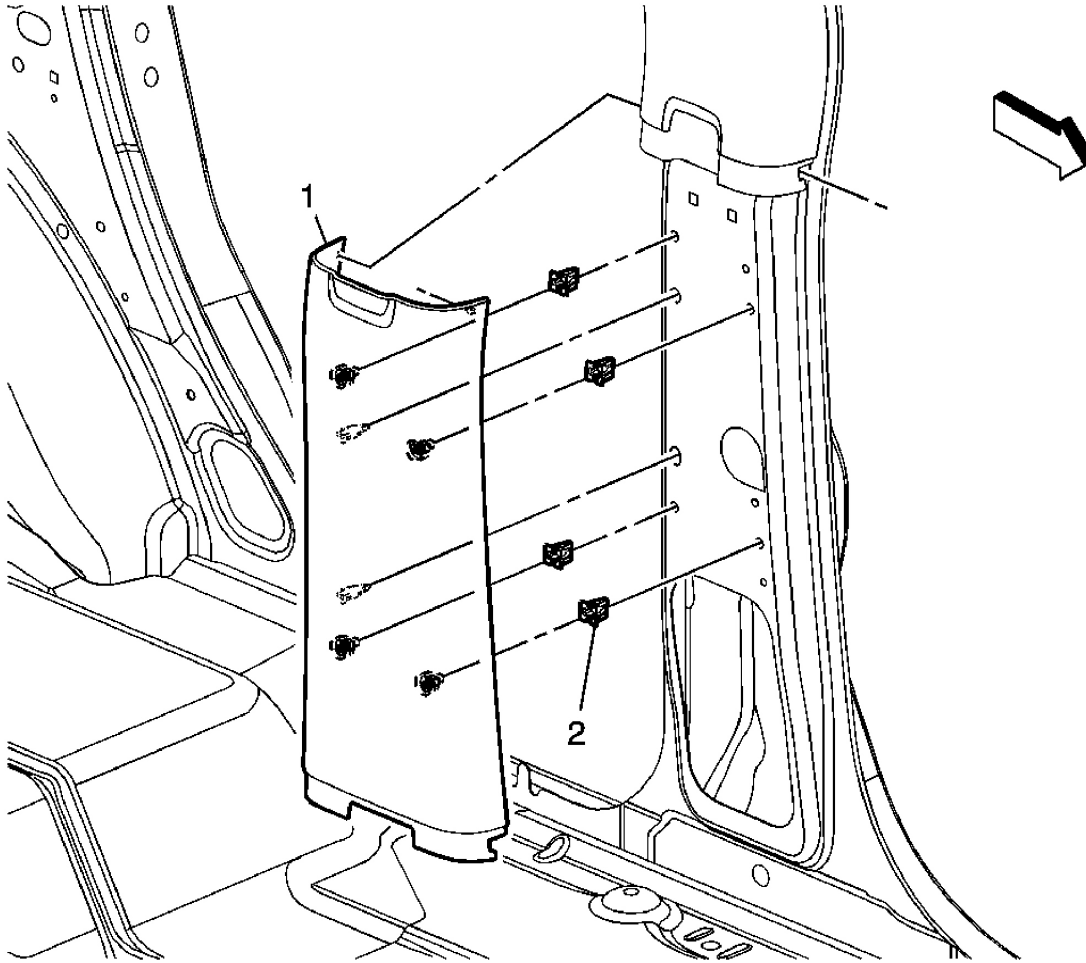
**Tip:** Ensure the tab on the top of the trim panel is secured.**CENTER PILLAR LOWER TRIM PANEL REPLACEMENT**

**Fig. 18: Lower Center Pillar Trim Panel Replacement**  
Courtesy of GENERAL MOTORS CORP.

**Center Pillar Lower Trim Panel Replacement**

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <b>Fastener Tightening Specifications</b> .	
1	Panel Assembly, Trim Center Pillar Lower
2	Clip, Center Pillar Lower Trim panel (Qty: 4)

**BODY SIDE TRIM PANEL REPLACEMENT - LEFT SIDE**

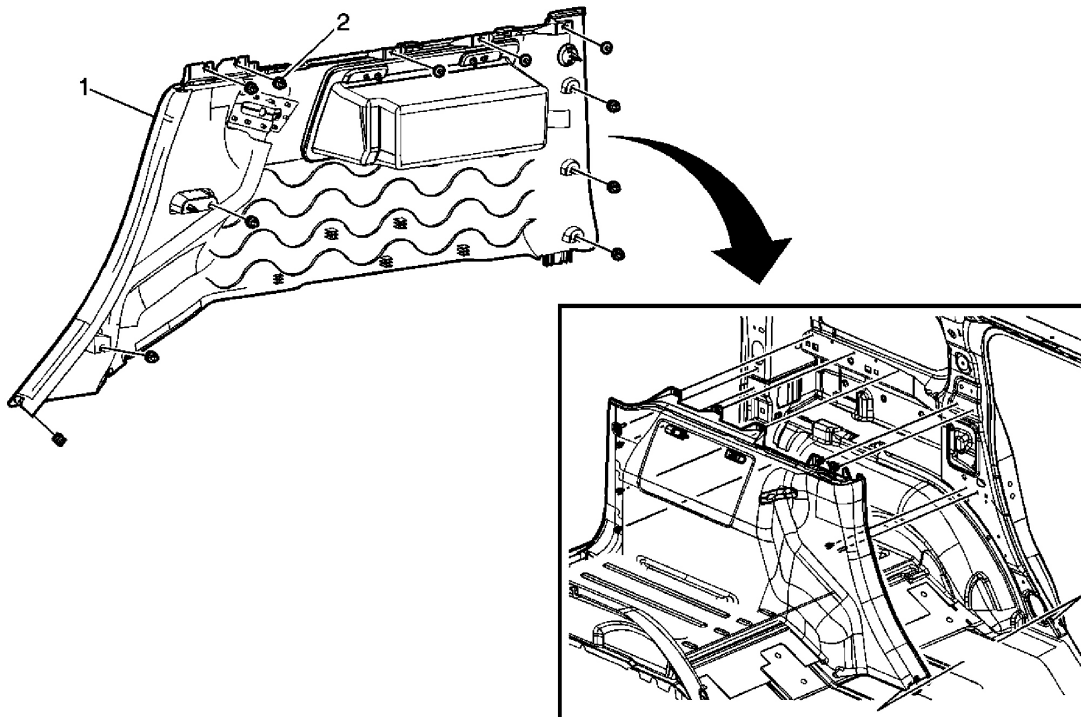


**Fig. 19: Left Body Side Trim Panel Replacement**  
Courtesy of GENERAL MOTORS CORP.

### Body Side Trim Panel Replacement - Left Side

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedures</b>	
1. Remove the rear door sill trim plate. Refer to <u>Rear Side Door Sill Plate Replacement</u> .	
2. Disconnect the rear seat belt. Refer to <u>Rear Seat Belt Retractor Replacement</u> .	
3. Remove the rear body side upper trim. Refer to <u>Body Side Rear Upper Garnish Molding Replacement</u> .	
1	Panel Assembly, Body Side Lower Trim <b>Tip:</b> Pull the seat belt through the trim panel.
2	Retainer, Body Side Lower Trim Panel (Qty: 11)


### BODY SIDE TRIM PANEL REPLACEMENT - RIGHT SIDE

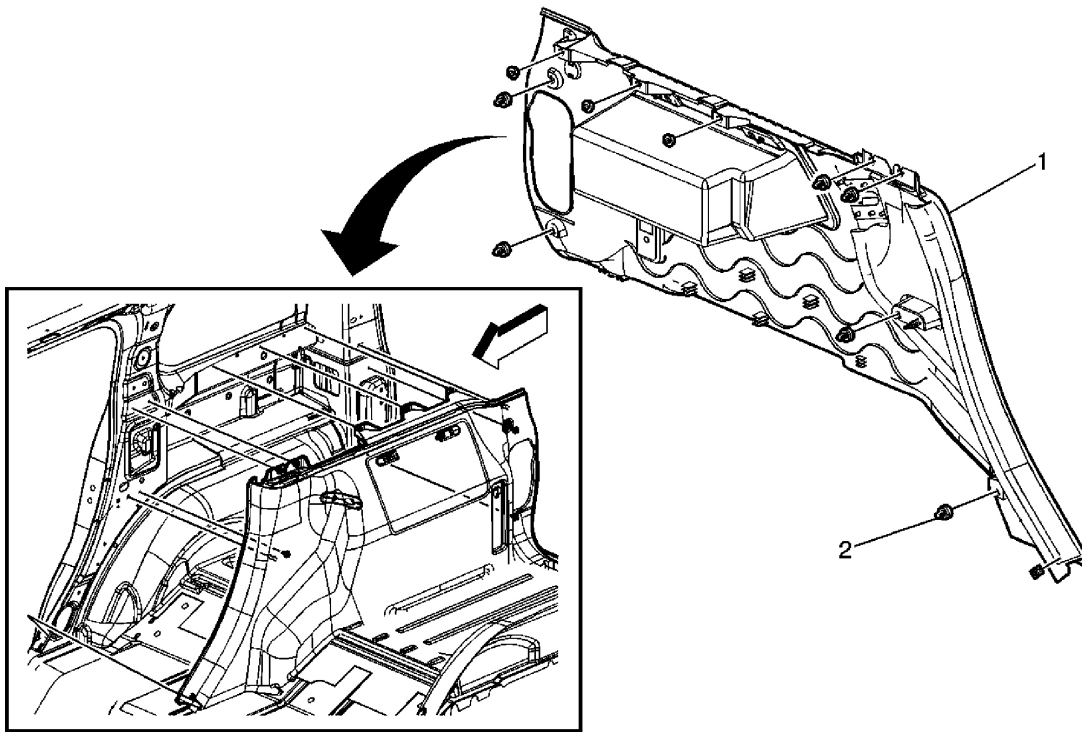

**Fig. 20: Right Body Side Trim Panel Replacement**  
 Courtesy of GENERAL MOTORS CORP.

### Body Side Trim Panel Replacement - Right Side

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedures</b>	
<ol style="list-style-type: none"> <li>1. Remove the rear door sill trim plate. Refer to <u>Rear Side Door Sill Plate Replacement</u>.</li> <li>2. Disconnect the rear seat belt. Refer to <u>Rear Seat Belt Retractor Replacement</u>.</li> <li>3. Remove the rear body side upper trim. Refer to <u>Body Side Rear Upper Garnish Molding Replacement</u>.</li> </ol>	
1	Panel Assembly, Body Side Lower Trim <b>Tip:</b> <ol style="list-style-type: none"> <li>1. Disconnect the accessory power outlet connector.</li> <li>2. Pull the seat belt through the trim panel.</li> </ol>
2	Retainer, Body Side Lower Trim Panel (Qty: 10)

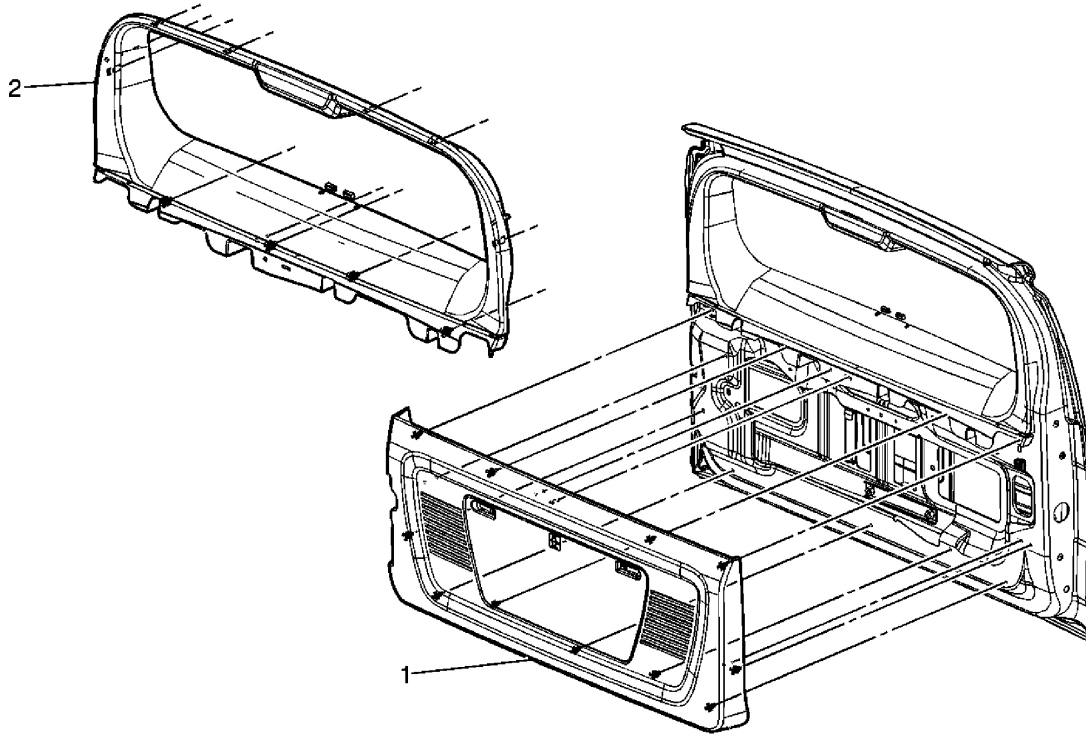**ENDGATE TRIM PANEL REPLACEMENT**

**Fig. 21: Endgate Trim Panel Replacement**  
Courtesy of GENERAL MOTORS CORP.

**Endgate Trim Panel Replacement**

Callout	Component Name
<b>Fastener Tightening Specifications:</b> Refer to <u>Fastener Tightening Specifications</u> .	
<b>Preliminary Procedure:</b> Remove the lower liftgate trim finish panel.	
1	Lower Trim Finish Panel Assembly Lift Gate
2	Liftgate Lower Trim Finish Panel Retainer (Qty: 10)
3	Upper Trim Finish Panel Assembly Lift Gate
4	Liftgate Upper Trim Finish Panel Retainer (Qty: 12)